


MODEL # AAU-345R3

RECOMMENDED MINIMUM
POOL AREA RESERVED FOR
EACH SLIDE OPERATION IS
10'W x 20'L WITH MINIMUM
WATER DEPTH OF 36\".

MODEL # AAU-345L3

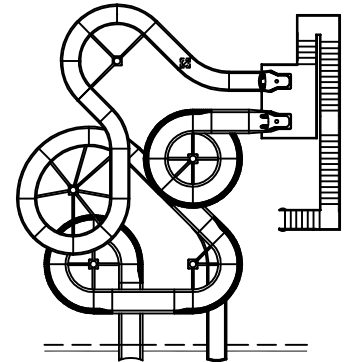

PRELIMINARY LAYOUT – FOR REVIEW AND APPROVAL ONLY.
SPECIFICATIONS SUBJECT TO CHANGE
NOT FOR CONSTRUCTION

BASE SPECS

	A	B
RIDE LENGTH	177.45'	168.19'
CENTERLINE LENGTH	153.91'	153.53'
TOWER HEIGHT	21.42'	21.42'
UPPER LANDING HEIGHT	18.00'	18.00'
MID LANDING HEIGHT	11.17'	11.17'
LOWER LANDING HEIGHT	3.66'	3.66'
SLOPE	14.02%	14.05%
OPEN FLUME WIDTH	36.00"	32.00"
CENTERLINE RADIUS	72.00"	VARIES
STAIRWAY WIDTH	36.00"	36.00"
STAIRWAY CONFIG	7/11	7/11
DESIGNED WATER FLOW	800 GPM	800 GPM
PUMP MOTOR	10 HP	10 HP

CONFIDENTIAL – PROPERTY OF USA SLIDE, INC

AQUA ADRENALINE SERIES

MODEL AAU-345	DRAWN BY RLP	DWG. DATE OCT 13, 2010
DWG SCALE 3/32" = 1'-0"	REVISION 1	DWG. NO. AAU345X

USA SLIDE

USA SLIDE, INC
1180 AIRPORT PARKWAY
GAINESVILLE, GEORGIA
30501 USA

PHONE: 770 297 1551
1 800 872 7543
FAX: 770 297 9633
www.usaslide.com